

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

Attorney's Docket: 2000FR303  
Serial No.: 09/821,876  
Art Unit 1711

**BEST AVAILABLE COPY****REMARKS***arg are convincing*

Applicants note from the Advisory action mailed May 27, 2003, that the declaration to disqualify Jacquinet et al USP 6,136,912 was successful.

Applicants believe that the only objection to the claims

Applicants believe that the only objection to claims 1-16 are under 35 USC § 103(a) as being obvious from Jacquinet JP 11-246789, FR 2 772 777 or EP 0 926 170 A1 in view of Swofford '828. Applicants traverse this rejection. The motivation to modify the prior art must flow from some teaching in the art that suggests the desirability or incentive to make the modification needed to arrive at the claimed invention. See *In re Napier*, 55 F. 3d 610, 613, 34 USPQ 2d 1782, 1784 (Fed. Cir. 1995) ("Obviousness cannot be established by combining the teachings of the prior art to produce the claimed invention, absent some teaching, suggestion or incentive supporting the combination."); accord *In re Geiger*, 815 F. 2d 686, 688, 2 USPQ 2d 1276, 1278 (Fed. Cir. 1987); *In re Laskowski*, 871 F.2d 115, 117, 10 USPQ 2d 1397, 1399 (Fed. Cir. 1989) ("[t]he mere fact that the prior art could be so modified would not have made the modification obvious unless the prior art suggested the desirability of the modification") (quoting *In re Gordon*, 733 F.2d 900, 902, 221 USPQ 1125, 1127 (Fed. Cir. 1984)). The Office argues that Swofford discloses a multifunctional acrylate. However the Office ignores that Swofford in column 7 discloses that up to 35 weight percent, preferably 15 to 25 weight percent, based on the total weight of the aqueous dispersion, of lower alkanol may be added to enhance stability. Jacquinet teaches very low solvent water and solvent content. One of ordinary skill would not assume that a multifunctional acrylate that works in a system that employs up to 35 weight percent volatile organic solvent would work in Jacquinet system of very low solvent and water content.

**BEST AVAILABLE COPY**

Attorney's Docket: 2000FR303  
Serial No.: 09/821,876  
Art Unit 1711

The Office argues that Applicants arguments are not p rsuasive, yet the Office is merely **picking and choosing** only the facts in these cases, which support the Office's 103 objection and clearly ignoring the pertinent facts which clearly teach away from the combination of references. For purposes of these arguments Applicants note that the Jacquinet JP 11-246789, FR 2 772 777 or EP 0 926 170 A1 references are the foreign equivalents of the Jacquinet '912 reference which has been removed but which is and English equivalent. The Office argues that Jacquinet teach compositions comprising substantial amounts of isopropanol. This is true, and as the Office goes on to state that Swofford uses lower amount of alkanol solvent than Jacquinet, this may also be true. However, what the Office is selectively disregarding is that in the Jacquinet reference ('912 column 4, lines 32-36) is that the Jacquinet alcohol is eliminated through azeotropic distillation under low pressure. In Swofford the alcohol is never eliminated.

The Office avers that Swofford does not mention the residual wt. % water in the disclosed composition. This is not true. Swofford as Applicants point out **again**, in column 7, discloses that up to 35 weight percent, preferably 15 to 25 weight percent, based on the total weight of the aqueous dispersion. The Office seems to be **selectively ignoring all clear and relevant facts**, which clearly teach away from combining the references, in favor of any support, no matter how badly it is taken out of context, which supports the Office's position. The Office now argues that Swofford in example 1, discloses heating a mixture of vinyltrimethoxysilane and the Nalco colloidal silica. What the office fails to say is that the mixture is heated to 60°C. Then the office has the audacity to claim "[a] low residual water content would be expected after hydrolysis of the of the vinyltrimethoxysilane and the colloidal silica." Water has a boll point of 100°C, isopropanol has a boiling point of 82.4°C, heating this mixture to 60°C is not going to significantly effect the level of water or isopropanol in the mixture. Appiicants have attached pages from Hawley's Condensed Chemical Dictionary to support the boiling points of water and isopopropanol. Further attached are

**BEST AVAILABLE COPY**

Attorney's Docket: 2000FR303  
Serial No.: 09/821,876  
Art Unit 1711

technical data sheets from Nalco which show that the Colloidal Silica NALCO 1034A taught in Example 1 of Swofford has a % silica of 34% which means that 66% of NALCO 1034A is water or other liquid medium.

The office then goes on to say that "[t]he composition is dried at 75° C and then irradiated to crosslink." What the office selectively leaves out is that this is done to the resulting coating composition, not just the colloidal silica composition.

Clearly Jacquinet teaches a colloidal suspension with very low residual water. However, just because both Jacquinet and Swofford teach a composition comprising a multifunctional acrylate and an alkanol does not make the two references equivalents. One of ordinary skill would not assume that the specific multifunctional acrylate that works in a system that employs up to 35 weight percent volatile organic solvent would work in Jacquinet system of very low solvent and water content. Applicants respectfully request that the rejections under 35 USC § 103(a) be withdrawn and the claims allowed.


As the total number of claims does not exceed the number of claims originally paid for, no fee is believed due. However if an additional fee is required, the Commissioner is hereby authorized to credit any overpayment or charge any fee deficiency to Deposit Account No. 03-2060.

**BEST AVAILABLE COPY**

Attorney's Docket: 2000ER303  
Serial No.: 09/821.876  
Art Unit: 1711

Reconsideration and allowance of this application is respectfully requested.

Respectfully submitted,

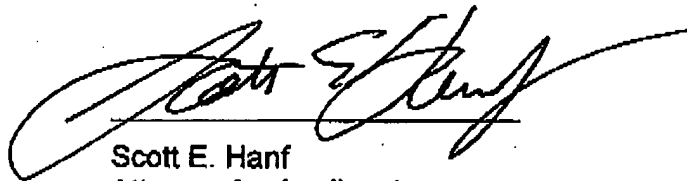

Scott E. Hanf  
Attorney for Applicant  
Registration No. 38,906

**Customer Number 25,255**

CLARIANT CORPORATION  
INDUSTRIAL PROPERTY DEPARTMENT  
4000 Monroe  
Charlotte, NC 28205 USA  
Phone (704) 331-7140  
Fax (704) 331-7707

Attachment: Definitions from Hawley's Condensed Chemical Dictionary (6 pages)  
Handbook of Chemistry and Physics (3 pages)  
Nalco Literature on Colloidal Silica's (2 Pages)

FAX RECEIVED  
JUN 17 2003  
GROUP 1700

*Hawley's*  
*Condensed Chemical*  
*Dictionary*

**TWELFTH EDITION**

Revised by  
Richard J. Lewis, Sr.



VAN NOSTRAND REINHOLD COMPANY  
New York

Copyright © 1993 by Van Nostrand Reinhold

ITP™ Van Nostrand Reinhold is a division of International Thomson Publishing, Inc.  
The ITP logo is a trademark under license

Printed in the United States of America

For more information, contact:

Van Nostrand Reinhold  
115 Fifth Avenue  
New York, NY 10003

Chapman & Hall GmbH  
Pappelallee 3  
69469 Weinheim  
Germany

Chapman & Hall  
2-6 Boundary Row  
London  
SE1 8HN  
United Kingdom

International Thomson Publishing Asia  
221 Henderson Road #05-10  
Henderson Building  
Singapore 0315

Thomas Nelson Australia  
102 Dodds Street  
South Melbourne, 3205  
Victoria, Australia

International Thomson Publishing Japan  
Hirakawacho Kyowa Building, 3F  
2-2-1 Hirakawacho  
Chiyoda-ku, 102 Tokyo  
Japan

Nelson Canada  
1120 Birchmount Road  
Scarborough, Ontario  
Canada M1K 5G4

International Thomson Editores  
Campos Eliseos 385, Piso 7  
Col. Polanco  
11560 Mexico D.F. Mexico

All rights reserved. Certain portions of this work © 1930, 1920, 1919 by The Chemical Catalog Co., Inc., and 1978, 1981, 1977, 1971, 1966, 1956, 1950 by Van Nostrand Reinhold. No part of this work covered by the copyright hereon may be reproduced or used in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems—without the written permission of the publisher.

96 97 98 99 HAM 10 9 8 7 6 5

#### Library of Congress Cataloging-in-Publication Data

Condensed chemical dictionary.

Hawley's condensed chemical dictionary.—12th ed./revised by

Richard J. Lewis, Sr.

p. cm.

ISBN 0-442-01151-8

I. Chemistry—Dictionaries. I. Hawley, Gessner Goodrich, 1905-1983

II. Lewis, Richard J., Sr. III. Title.

QD5.C5 1992

540'.3—dc20

92-18951

CIP

659

## ISOPROPYLACETONE

ow liquid  
58C at 10  
at 20C, d  
ketones,  
hydrocar-

ant which

bility, re-  
mical re-

).

45-348C,  
ible in al-  
zene and

(2) liquid  
direct oxi-  
h heavy-

and other

file.

loride).

bp 276C,  
ether and  
water and

s, resins,  
eagent.

pineering-  
extrusion  
-resistant  
anate.

l on iso-

ethyl-1,3-

ular unit

-146C,  
d 0.6808  
oluble in

water, soluble in alcohol, ether, and hydrocar-  
bon solvents, autoign temperature 802F (427C).

Derivation: (1) From cracked products of heavy  
petroleum oils, (2) dehydrogenation of isopen-  
tene, (3) pyrolysis of methylpentene or of isobu-  
tyleneformaldehyde condensation products, (4)  
dehydration of methyl butenol.

Grade: Polymerization (min purity 99%), re-  
search (99.99%).

Hazard: Highly flammable, dangerous fire and  
explosion risk. Irritant.

Use: Monomer for manufacture of polyisoprene,  
chemical intermediate, component of butyl rub-  
ber.

See also polyisoprene, rubber, natural.

isoprenoid. A compound based on the isoprene  
structure. These include many naturally occur-  
ring materials such as terpenes, rubber, and cho-  
lesterol and other steroids.

isopropanol. Legal label name for isopropyl al-  
cohol.

isopropanolamine. (MIPA; 2-hydroxypropyla-  
mine; 1-amino-2-propanol). CAS: 78-96-6.  
 $\text{CH}_3\text{CH}(\text{OH})\text{CH}_2\text{NH}_2$ .

Properties: Liquid, slight ammonia odor, d  
0.9619, mp 1.4C; bp 159.9C, refr index 1.4462  
(20C), flash p 170F (76.6C), soluble in water.  
Combustible.

Use: Emulsifying agent, dry-cleaning soaps, solu-  
ble textile oils, wax removers, metal cutting oils,  
cosmetics, emulsion paints, plasticizers, insecti-  
cides.

isopropenyl acetate. CAS: 108-22-5.

$\text{CH}_3\text{COOC}(\text{CH}_3)\text{CH}=\text{CH}_2$ .  
Properties: Water white liquid, d 0.9226, bp  
97.4C, fp -92.9C, solubility in water 3.25% by  
wt (20C), refr index 1.4020 (20C), flash p 60F  
(15.5C) (OC).

Hazard: Flammable, dangerous fire risk.  
Use: Acylation reagent.

isopropenylacetylene. (2-methyl-1-buten-3-yne).  
 $\text{H}_2\text{C}=\text{C}(\text{CH}_3)\text{C}\equiv\text{CH}$ .

Properties: Colorless liquid, bp 33-34C, fp  
-113C, d 0.695 (20/20C, refr index 1.4168  
(20C), flash p below 20F (-6.6C) (TOC). Very  
slightly soluble in water and miscible with ace-  
tone, alcohol, benzene, carbon tetrachloride,  
and kerosene.

Hazard: Flammable, dangerous fire risk.

isopropenyl chloride. See chloropropene.

isopropenylchloroformate.

$\text{ClCOOC}(\text{CH}_3)\text{CH}=\text{CH}_2$ .  
Properties: Liquid, d 1.103 (20C), bp 93C (746  
mm Hg).

Derivation: Distillation of the reaction products  
of acetone and phosgene.

Hazard: Strong irritant to eyes and skin.

p-isopropoxydiphenylamine.

$\text{C}_6\text{H}_5\text{NHC}_6\text{H}_4\text{OCH}(\text{CH}_3)_2$ .

Properties: Dark gray flakes, d 1.10, set point  
80-86C, purity 92% (min), ash 0.10% (max).  
Insoluble in water; soluble in ethanol, acetone,  
benzene, and gasoline.

Use: Rubber anti-oxidant.

2-isopropoxyethanol. (IPE; isopropyl glycol;  
isopropyl "Cellosolve"). CAS: 109-59-1.

$(\text{CH}_3)_2\text{CHOCH}_2\text{CH}_2\text{OH}$ .

Properties: A mobile liquid with mw 104.15, d  
0.91, bp 139.5-144.5, vap press 2.6 torr at 20C.

Hazard: Combustible liquid with flash p 49C.

TLV: 25 ppm. Toxic by skin absorption.

Use: As a component of lacquers and other coat-  
ings, and as a solvent.

o-isopropoxyphenyl-N-methylcarbamate. (pro-  
poxur). CAS: 114-26-1.

$(\text{CH}_3)_2\text{CHOC}_6\text{H}_4\text{OOCNHCH}_3$ .

Properties: White, crystalline powder; odorless;  
mp 91C. Soluble in most polar solvents, very  
slightly soluble in water, unstable in highly alka-  
line media, stable under normal use conditions.

Hazard: Toxic by ingestion and inhalation. TLV:  
0.5 mg/m<sup>3</sup> of air.

Use: Insecticide, molluscicide.

β-isopropoxypropionitrile.

$(\text{CH}_3)_2\text{CHO}(\text{CH}_2)_2\text{CN}$ .

Properties: Colorless to straw-colored liquid,  
combines the chemical and physical properties  
of ethers and nitriles, fp -67C, bp 82-86C (25  
mm Hg) 65-65.5C (10 mm Hg), d 0.9058 (25C),  
slightly soluble in water, soluble in organic sol-  
vents, flash p 155F (68.3C). Combustible.

Isopropyl acetate. CAS: 108-21-4.

$\text{CH}_3\text{COOCH}(\text{CH}_3)_2$ .

Properties: Colorless liquid, aromatic odor, bp  
89.4C, d 0.8690 (25/4C), refr index 1.378 (20C),  
sp ht 0.46 cal/g, fp -73.4C, heat of vaporiza-  
tion 135 Btu/lb, viscosity (25C) 0.49 cP, solubil-  
ity in water 2.9 wt %, flash p 40F (4.4C), bulk d  
7.17 lb/gal (20C), miscible with most organic  
solvents, autoign temperature 860F (460C).

Derivation: By reacting isopropyl alcohol with  
acetic acid in the presence of catalysts.

Grade: 95%, 85-88%.

Hazard: Flammable, dangerous fire risk. TLV:  
250 ppm in air.

Use: Solvent for nitrocellulose, resin gums, etc.;  
paints, lacquers, and printing inks; organic syn-  
thesis, perfumery.

isopropylacetone. See methyl isobutyl ketone.



## N-ISOPROPYLACRYLAMIDE

660

**N-isopropylacrylamide.** (NIPAM). Crystalline solid; homopolymers and copolymers prepared with this material show inverse solubility in water.

Use: Binders in textiles, paper, adhesives, detergents, cosmetics.

See also acrylic resin.



**isopropyl alcohol.** (IPA; dimethylcarbinol; sec propyl alcohol; isopropanol; 2-propanol). CAS: 67-63-0.  $(\text{CH}_3)_2\text{CH}_2\text{O}$ . 48th highest-volume chemical produced in U.S. (1991).

Properties: Colorless liquid, pleasant odor, bp 82.4C, d 0.7863 (20/20C), refr index 1.3756 (20C), sp ht 0.65 cal/g, fp -86C, critical temperature 235C, critical pressure 53 atm, vap press 33 mm Hg at 20C, flash p 53F (11.7C) (TOC), heat of combustion 14,346 Btu/lb, heat of vaporization 288 Btu/lb, viscosity 2.1 cP (25C), autoign temperature 850F (453C). Soluble in water, alcohol, and ether.

Derivation: By treatment of propylene with sulfuric acid and hydrolyzing.

Method of purification: Rectification.

Grade: 91%, 95%, 99%, NF (99%), nanograde.

Hazard: Flammable, dangerous fire risk, explosive limits in air 2-12%. Toxic by ingestion and inhalation. TLV: 400 ppm in air.

Use: Manufacture of acetone and its derivatives, manufacture of glycerol and isopropyl acetate, solvent for essential and other oils, alkaloids, gums, resins, etc.; latent solvent for cellulose derivatives, coatings solvent, deicing agent for liquid fuels, lacquers, extraction processes, dehydrating agent, preservative, lotions, denaturant.

**isopropylamine.** (2-aminopropane).

CAS: 75-31-0.  $(\text{CH}_3)_2\text{CHNH}_2$ .

Properties: Colorless, volatile liquid. Amine odor, strong alkaline reaction, bp 32.4C, fp -101C, d 0.6881 (20/20C), bulk d 5.7 lb/gal (20C), refr index 1.3770 (15C), flash p (OC) -35F (-37.2C), autoign temperature 756F (402C). Miscible with water, alcohol, and ether. Derivation: From acetone and ammonia under pressure.

Hazard: Highly flammable, dangerous fire risk. Strong irritant to tissue. TLV: 5 ppm in air.

Use: Solvent, intermediate in synthesis of rubber accelerators, pharmaceuticals, dyes, insecticides, bactericides, textile specialties, and surface-active agents, dehairing agent, solubilizer for 2,4-D acid.

**p-isopropylaminodiphenylamine.** See N-isopropyl-N'-phenyl-p-phenylenediamine.

**isopropylaminoethanol.** (IPAE).

CAS: 109-56-8. A commercial mixture of approximately 60% isopropylethanolamine,

$(\text{CH}_3)_2\text{CHNHCH}_2\text{CH}_2\text{OH}$ , and 40% isopropylethanolamine,  $(\text{CH}_3)_2\text{CHN}(\text{CH}_2\text{CH}_2\text{OH})_2$ . Properties: Amber to straw-colored liquid, distillation range 110-165C, fp approximately -50C, d 0.91-0.94 (20/20C), flash p 145-155F (62.7-68.3C) (OC). Combustible.

Use: Synthesis of emulsifiers.

**N-isopropylaniline.** CAS: 768-52-5.

$\text{C}_6\text{H}_5\text{NHCH}(\text{CH}_3)_2$ .

Properties: Yellowish liquid, bp 206C, pour point below -67C, refr index 1.5365 (20C), flash p 190F (87.7C) (COC). Combustible.

Hazard: Toxic by inhalation and skin absorption. TLV: 2 ppm in air.

Use: Dyeing acrylic fibers, chemical intermediate.

**p-isopropylaniline.** See cumidine.

**isopropyl antimonite.**  $[(\text{CH}_3)_2\text{CHO}]_3\text{Sb}$ .

Properties: Colorless liquid, bp 82C at 7 mm Hg pressure.

Derivation: Reaction of antimony trichloride with isopropanol.

Use: Cross-linking agent, flameproofing agent.

**isopropylarsine.** See "Epigrade" [Advanced].

**p-isopropylbenzaldehyde.** See cuminic aldehyde.

**isopropylbenzene.** See cumene.

**p-isopropylbenzyl alcohol.** See cuminic alcohol.

**isopropylbiphenyl.** See "Tanacol CG" [Sybron].

**isopropyl bromide.** CAS: 75-26-3.

$\text{CH}_3\text{CHBrCH}_3$ .

Properties: Colorless liquid, d 1.304 (25/25C), bp 58.5-60.5C, fp -90C, refr index 1.422 (25C), flash p none, slightly soluble in water, soluble in ethanol and ether. Non-flammable.

Use: Synthesis of pharmaceuticals, dyes, other organics.

**isopropyl butyrate.** CAS: 638-11-9.

$(\text{CH}_3)_2\text{CHOOCC}_3\text{H}_7$ .

Properties: Colorless liquid, d 0.8652 (13C), bp 128C.

Use: Solvent for cellulose ethers, flavoring.

**isopropylcarbinol.** See isobutyl alcohol.

**isopropyl chloride.** CAS: 75-29-6.

$\text{CH}_3\text{CHClCH}_3$ .

Properties: Colorless liquid, d 0.858 (25/25C), bp 34.8C, fp -117.6C, refr index 1.374 (25C), flash p -26F (-32.3C), autoign temperature 1100F (593C), slightly soluble in water, soluble in ethanol and ether.

Haz  
risk  
Use:

N-Iso  
N-i

isopr

isopr  
(CH  
Pro  
tive  
Haz  
Use:  
me

isopr  
chl

isopr  
py.  
Use  
See

isop

isop

isop

isop

isop  
et

2-iso  
pipe  
C.  
Pr  
in  
Us  
w  
w  
be

isop  
et

isop  
o  
(  
Pr  
c  
ti  
r  
c  
n  
s  
o  
u

## WASTE, HAZARDOUS

1224

(polystyrene bottles) to render them biodegradable. (6) High-pressure hydrogenation of garbage to yield a low-sulfur combustible oil. (7) Deactivating radioactive wastes by adsorption or ion exchange, as well as by solidification and hydraulic fracturing; high-activity wastes are buried in steel-lined concrete tanks. (8) Catalytic oxidation of waste chlorinated hydrocarbons, with partial recovery of chlorine. (9) Incineration of semi-solid and liquid wastes at sea in ships designed for that purpose.

See also radioactive waste, chemical waste, sewage sludge, urban waste.

waste, hazardous. See chemical waste, radioactive waste.

waste, radioactive. See radioactive waste.

waste wool, wet. See wool waste.

"Watchung" [Du Pont]. TM for precipitated diazo red pigments.

water. (ice, steam).  $H_2O$  or  $HOH$ .

Properties: Colorless, odorless, tasteless liquid. Allotropic forms are ice (solid) and steam (vapor). Water is a polar liquid with high dielectric constant (81 at 17°C), which largely accounts for its solvent power. It is a weak electrolyte, ionizing as  $H_3O^+$  and  $OH^-$ . At atmospheric pressure it has d 1.00 (4°C), fp 0°C (32°F) and expands about 10% on freezing. Viscosity 0.01002 poise (20°C), sp heat 1 calorie/g, vap press 760 mm Hg (100°C), triple point 273.16K at 4.6 mm, surface tension 73 dynes/cm at 20°C, latent heat of fusion (ice) 80 cal/g, latent heat of condensation (steam) 540 cal/g. Bulk d 8.337 lb/gal, 62.3/lb/cu ft. Refr index 1.333. Water may be superheated by enclosing in an autoclave and increasing pressure; it may be supercooled by adding sodium chloride or other ionizing compound. It has definite catalytic activity, especially of metal oxidation. Physiologically water is classed as a nutrient substance.

Derivation: (1) Oxidation of hydrogen, (2) end product of combustion, (3) end product of acid-base reaction, (4) end product of condensation reaction.

Purification: (1) Distillation, (2) ion-exchange reaction (zeolite), (3) chlorination, (4) filtration.

Use: Suspending agent (papermaking, coal slurries), solvent (extraction, scrubbing), diluent, beer and carbonated beverages, hydration of lime, paper coatings, textile processing, moderator in nuclear reactors, debarking logs, industrial coolant, filtration, washing and scouring, sulfur mining, hydrolysis, Portland cement, hydraulic systems, power source, steam generation, food industry, source of hydrogen by electrolysis and thermochemical decomposition.

See hydrogen. See also ice; steam; heavy water; ocean water; water, hard.

water, bound. See bound water.

water gas. (blue gas). A mixture of gases made from coke, air, and steam. The steam is decomposed by passing it over a bed of incandescent coke, or by high-temperature reaction with natural gas or similar hydrocarbons. Approximate composition: carbon monoxide 40%, hydrogen 50%, carbon dioxide 3%, and nitrogen 3%.

Hazard: Flammable, dangerous fire and explosion risk. Explosive limits 7-72% in air. Toxic by inhalation.

Use: Organic synthesis, fuel gas, ammonia synthesis.

See also synthesis gas.

water glass. See sodium silicate.

water, hard. Water containing low percentages of calcium and magnesium carbonates, bicarbonates, sulfates, or chlorides, as a result of long contact with rocky substrates and soils. Degree of hardness is expressed either as grains per gallon or parts per million (ppm) of calcium carbonate (1 grain of  $CaCO_3$  per gal is equivalent to 17.1 ppm). Up to 5 grains is considered soft, over 30 grains is very hard. Hardness may be temporary (carbonates and bicarbonates) or permanent (sulfates, chlorides). Treatment with zeolites is necessary to soften permanently hard water. Temporary hardness can be reduced by boiling. These impurities are responsible for boiler scale and corrosion of metals on long contact. Hard waters require use of synthetic detergents for satisfactory "sudsing."

See also zeolite.

watermark. See dandy roll.

water of crystallization. Water chemically combined in many crystallized substances; it can be removed at or near 100°C, usually with loss of crystalline properties.

water pollution. Contamination of fresh or salt water with materials that are toxic, noxious, or otherwise harmful to fish and other animals and to man, including thermal pollution. Disposal of untreated chemical and municipal wastes in streams and rivers has been illegal since the early 1900s; in 1973 the EPA prohibited dumping of all types of wastes into the ocean. Unintentional pollution results from run-off containing toxic insecticidal residues. Oil spills at sea are a continual problem and probably will remain so.

See also waste treatment, oil spill treatment, Environmental Protection Agency, environmental chemistry.

waterproof  
stance  
layer,  
wax, c  
on a w  
masor

(2) A  
pregni  
an air  
are th  
and di  
persio  
mate,  
in the  
the di  
volve  
the fi  
usual  
effect  
coat  
bondi

water p  
proce  
to ren  
follow  
in wh  
settle  
coagi  
mean  
dium  
colloi  
coagi  
sand,  
remo  
whicl  
swim  
vated  
nants  
hardi  
proce  
The  
remo  
centr  
pape

water-s

water-s  
s ap  
solve  
Use: I  
brica  
See al

water-s

wattle  
Deriv  
can  
cont

## HYDROLIQUEFACTION

618

**hydroliquefaction.** Production of liquid hydrocarbon fuels by hydrogenation of coal. See gasification; oil/gas process.

**hydrotube.** A water-glycol base non-combustible hydraulic fluid.

**hydrolysis.** A chemical reaction in which water reacts with another substance to form two or more new substances. This involves ionization of the water molecule as well as splitting of the compound hydrolyzed, e.g.,  $\text{CH}_3\text{COOC}_2\text{H}_5 + \text{H}_2\text{O} \rightarrow \text{CH}_3\text{COOH} + \text{C}_2\text{H}_5\text{OH}$ . Examples are conversion of starch to glucose by water in the presence of suitable catalysts; conversion of sucrose (cane sugar) to glucose and fructose by reaction with water in the presence of an enzyme or acid catalyst; conversion of natural fats into fatty acids and glycerol by reaction with water in one process of soap manufacture; and reaction of the ions of a dissolved salt to form various products, such as acids, complex ions, etc.

**hydrolyzed vegetable proteins.** See "Hydrotritium" [Croda].

**"Hydro-Magma" [Marine].** (magnesium hydroxide). CAS: 1309-42-8. TM for magnesium hydroxide added to Milk of Magnesia as an antacid, alkaline buffer, and chemical thickener.

Use: Antacid, alkaline buffer, and chemical thickener in the food, pharmaceutical, cosmetic, rubber, plastics, and adhesives industries.

**hydrometer.** Device for measuring the density of liquids. See also Baumé.

**hydronium ion.** An ion ( $\text{H}_3\text{O}^+$ ) formed by the transfer of a proton (hydrogen nucleus) from one molecule of water to another; a companion ion ( $\text{OH}^-$ ) is also formed; the reaction is  $2\text{H}_2\text{O} \rightarrow \text{H}_3\text{O}^+ + \text{OH}^-$ . Formation of such ions is statistically rare, resulting from the interaction of water molecules in a ratio of 1:556 million.

**hydroperoxide.** An organic peroxide having the generalized formula  $\text{ROOH}$ . An example is ethyl hydroperoxide ( $\text{C}_2\text{H}_5\text{OOH}$ ). Methyl and ethyl hydroperoxides are unstable and thus are strong oxidizing agents and explosion hazards; those of higher molecular weight are more stable. Hydroperoxides can be derived by oxidation of saturated hydrocarbons, or by alkylating hydrogen peroxide in a strongly acidic environment. They are used as polymerization initiators.

**hydrophilic.** Having a strong tendency to bind or absorb water, which results in swelling and for-

mation of reversible gels. This property is characteristic of carbohydrates, such as algin, vegetable gums, pectins, and starches, and of complex proteins such as gelatin and collagen.

**hydrophobic.** Antagonistic to water, incapable of dissolving in water. This property is characteristic of all oils, fats, waxes, and many resins, as well as of finely divided powders like carbon black and magnesium carbonate.

**hydroponics.** See nutrient solution.

**hydroquinol.** See hydroquinone.

**hydroquinone.** (quinol; hydroquinol; p-dihydroxybenzene). CAS: 123-31-9.  $\text{C}_6\text{H}_4(\text{OH})_2$ . Properties: White crystals; soluble in water, alcohol, and ether; d 1.330; mp 170C; bp 285C; flash p 329F (165C); autoign temperature 960F (515.5C). Combustible.

Derivation: Aniline is oxidized to quinone by manganese dioxide and is then reduced to hydroquinone.

Grade: Technical, photographic.

Hazard: Toxic by ingestion and inhalation; irritant. TLV: 2 mg/m<sup>3</sup> of air.

Use: Photographic developer (except color film); dye intermediate; inhibitor; stabilizer in paints and varnishes, motor fuels, and oils; antioxidant for fats and oils; inhibitor of polymerization; skin hyperpigmentation.

**hydroquinone benzyl ether.** See p-benzyloxyphenol.

**hydroquinone dibenzyl ether.** CAS: 103-16-2.

$\text{C}_6\text{H}_5\text{CH}_2\text{OC}_6\text{H}_4\text{OCH}_2\text{C}_6\text{H}_5$ . Properties: Tan powder; mp 119C (min); purity 90% (min); insoluble in water; soluble in acetone, benzene, and chlorobenzene. Combustible.

Use: Solvent; perfumes, soap, plastics, and pharmaceuticals.

**hydroquinone di-n-butyl ether.** (1,4-dibutoxybenzene).  $\text{C}_6\text{H}_4[\text{O}(\text{CH}_2)_4\text{CH}_3]_2$ .

Properties: White flakes with no appreciable odor; mp 45-46C; bp 124C (1.3 mm Hg), 158C (15.0 mm Hg); insoluble in water; soluble in benzene, acetone, ethyl acetate, and alcohol. Combustible.

**hydroquinone diethyl ether.** (1,4-diethoxybenzene).  $\text{C}_6\text{H}_4(\text{OC}_2\text{H}_5)_2$ .

Properties: White granular solid with anise-like odor, mp 71-72C, bp 246C. Neither boiling caustic nor acid solution causes any hydrolysis. Absorbs UV light. Insoluble in water; soluble in benzene, acetone, ethyl acetate, and alcohol. Combustible.

**hydroquin**  
(p-di-[2  
 $\text{C}_6\text{H}_4(\text{O}$   
Properti  
(0.3 mr  
organic  
Combu  
Use: Pre  
urethar  
thesis.

**hydroqu**  
benzen  
CAS: 6  
Propert  
bp 213  
cP (65  
light in  
and alc  
Use: W  
ative in  
metics  
ing.

**hydroqu**  
 $\text{CH}_3(\text{C}$   
Proper  
(1.4 m  
zene,  
bustib


**hydroqu**  
phenol  
Proper  
247C;  
zene,  
bustib  
Use: S

**hydroqu**  
phenol  
 $\text{CH}_3\text{C}$   
Proper  
243C  
readil  
ethyl  
Use: N  
cals,  
natec  
tor for  
inhib

**hydros**  
  
**hydros**  
taintu  
sure  
ride;  
for  
meat  
feed:

# CRC Handbook OF Chemistry and Physics

A Ready-Reference Book of Chemical and Physical Data

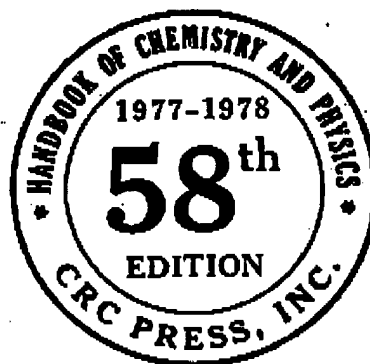

EDITOR

ROBERT C. WEAST, Ph.D.

*Vice President, Research, Consolidated Natural Gas Service Company, Inc.  
Formerly Professor of Chemistry at Case Institute of Technology*

In collaboration with a large number of professional chemists and physicists  
whose assistance is acknowledged in the list of general collaborators and in  
connection with the particular tables or sections involved.



CRC PRESS, Inc.  
2255 Palm Beach Lakes Blvd., West Palm Beach, Florida 33409

Handbook of

Chemical Rubber

Volume 1: Properties and Uses of Rubber



© 1974, 1975, 1976, 1977 by CRC Press, Inc.  
Second Printing, 1978

© 1964, 1965, 1966, 1967, 1968, 1969, 1970, 1971, 1972, 1973 by THE CHEMICAL RUBBER CO.

Copyright 1918, 1920 by The Chemical Rubber Company (Copyright renewed 1946, 1948 by Chemical Rubber Publishing Company)

Copyright 1922 (Copyright renewed 1950), 1925 (Copyright renewed 1953), 1926 (Copyright renewed 1954), 1927 (Copyright renewed 1955), 1929 (Copyright renewed 1957), 1936, 1937 (Copyright renewed 1965 by The Chemical Rubber Co.), 1939, 1940 (Copyright renewed 1968 by The Chemical Rubber Co.), 1941 (Copyright renewed 1969 by The Chemical Rubber Co.), 1942 (Copyright renewed 1970 by The Chemical Rubber Co.), 1943 (Copyright renewed 1971 by The Chemical Rubber Co.), 1944 (Copyright renewed 1972 by The Chemical Rubber Co.), 1945 (Copyright renewed 1973 by The Chemical Rubber Co.), 1947, 1949, 1950, 1951, 1952, 1953, 1954, 1955, 1956 by Chemical Rubber Publishing Company

© 1957, 1958, 1959, 1960, 1961, 1962 by Chemical Rubber Publishing Company

All Rights Reserved  
Library of Congress Card No. 13-11056  
PRINTED IN U.S.A.  
ISBN-0-8493-0458-X

## PHYSICAL CONSTANTS OF INORGANIC COMPOUNDS (Continued)

No.	Name	Synonyms and Formulas	Mol. wt.	Crystalline form, properties and index of refraction	Density or spec. gravity	Melting point, °C	Boiling point, °C	Solubility, in grams per 100		
								Cold water	Hot water	Other solvents
u40	Uranium									
u41	sodium carbonate	Na <sub>2</sub> CO <sub>3</sub> ·10H <sub>2</sub> O	542.02	yel or						
u42	sulfate	Na <sub>2</sub> SO <sub>4</sub> ·10H <sub>2</sub> O	426.14	yel-gra or	3.23 <sup>25</sup>	d 100				
u43	sulfate	Na <sub>2</sub> SO <sub>4</sub>	142.04	yel		sub 800				
u44	sulfate	Na <sub>2</sub> SO <sub>4</sub> ·7H <sub>2</sub> O	352.07	brn-bls, tetra		d 40-60				
v41	Vanadium									
v42	Vanadate	VO <sub>3</sub>	101.94	yel or						
v43	Vanadate	HVO <sub>3</sub>	117.03	br amorph						
v44	Vanadate	H <sub>2</sub> VO <sub>4</sub>	182.02	li gray met, cub	5.36	1890 ± 10	3300			
v45	Vanadate	H <sub>3</sub> VO <sub>4</sub>	253.03	3.03						
v46	Vanadate	H <sub>4</sub> VO <sub>4</sub>	324.04	hex	5.10					
v47	Vanadate	H <sub>5</sub> VO <sub>4</sub>	395.05	gre-blk, deliq	4.00 <sup>25</sup>	d				
v48	Vanadate	H <sub>6</sub> VO <sub>4</sub>	466.06	blk, cub	5.77	3810	3800			
v49	Vanadate	H <sub>7</sub> VO <sub>4</sub>	537.07	gre, hex, deliq	3.23 <sup>25</sup>					
v50	Vanadate	H <sub>8</sub> VO <sub>4</sub>	608.08	red-br liq	1.810 <sup>25</sup>	-25 ± 2	148.5 <sup>25</sup>			
v51	Vanadate	H <sub>9</sub> VO <sub>4</sub>	679.09	pink or, deliq	3.00 <sup>25</sup>	d				
v52	Vanadate	H <sub>10</sub> VO <sub>4</sub>	750.10	3.177 <sup>25</sup>			111.5 <sup>25</sup>			
v53	Vanadate	H <sub>11</sub> VO <sub>4</sub>	821.11	br yel	2.073 <sup>25</sup>	d 335				
v54	Vanadate	H <sub>12</sub> VO <sub>4</sub>	892.12	gre, rhomb	2.363 <sup>25</sup>	> 900				
v55	Vanadate	H <sub>13</sub> VO <sub>4</sub>	963.13	dk gr, rhomb	-3H <sub>2</sub> O, 100					
v56	Vanadate	H <sub>14</sub> VO <sub>4</sub>	1034.14	vit-cryst, hex	5.44	750-900				
v57	Vanadate	H <sub>15</sub> VO <sub>4</sub>	1105.15	gr or, deliq	d					
v58	Vanadate	H <sub>16</sub> VO <sub>4</sub>	1176.16	blk, cub	5.13	3320				
v59	Vanadate	H <sub>17</sub> VO <sub>4</sub>	1247.17	lt gray or	3.768 <sup>25</sup>	191				
v60	Vanadate	H <sub>18</sub> VO <sub>4</sub>	1318.18	bl or	4.730	1967				
v61	Vanadate	H <sub>19</sub> VO <sub>4</sub>	1389.19	yel-red, rhomb	2.357 <sup>25</sup>	990	d 1700			
v62	Vanadate	H <sub>20</sub> VO <sub>4</sub>	1460.20	1.60, 1.52, 1.78						
v63	Vanadate	H <sub>21</sub> VO <sub>4</sub>	1531.21	blk or	4.87 <sup>25</sup>	1970				
v64	Vanadate	H <sub>22</sub> VO <sub>4</sub>	1602.22	vit, oct	4.00 <sup>25</sup>	d 430				
v65	Vanadate	H <sub>23</sub> VO <sub>4</sub>	1673.23	br powd, deliq	d 180					
v66	Vanadate	H <sub>24</sub> VO <sub>4</sub>	1744.24	red liq	3.333 <sup>25</sup>	d 180	120 <sup>25</sup>			
v67	Vanadate	H <sub>25</sub> VO <sub>4</sub>	1815.25	yel brn powd	3.324, 3.64 <sup>25</sup>	127				
v68	Vanadate	H <sub>26</sub> VO <sub>4</sub>	1886.26	gre, deliq	2.85 <sup>25</sup>					
v69	Vanadate	H <sub>27</sub> VO <sub>4</sub>	1957.27	yel liq	1.829	-77 ± 2	128.7			
v70	Vanadate	H <sub>28</sub> VO <sub>4</sub>	2028.28	yel	3.399 <sup>25</sup>	d				
v71	Vanadate	H <sub>29</sub> VO <sub>4</sub>	2099.29	yel-wh, lygr	2.459 <sup>25</sup>	300	480			
v72	Vanadate	H <sub>30</sub> VO <sub>4</sub>	2170.30	met pr	4.42					
v73	Vanadate	H <sub>31</sub> VO <sub>4</sub>	2241.31	slv wh pr	5.48 <sup>25</sup>					
v74	Vanadate	H <sub>32</sub> VO <sub>4</sub>	2312.32	vit, monoc	d in air					
v75	Vanadate	H <sub>33</sub> VO <sub>4</sub>	2383.33	blk pl (met ?)	4.20	d				
v76	Vanadate	H <sub>34</sub> VO <sub>4</sub>	2454.34	blk-grn powd	3.0	d				
v77	Vanadate	H <sub>35</sub> VO <sub>4</sub>	2525.35	gre-blk pl, or powd	4.73 <sup>25</sup>	d > 900				
v78	Vanadate	H <sub>36</sub> VO <sub>4</sub>	2596.36	bl						
v79	Vanadate	H <sub>37</sub> VO <sub>4</sub>	2667.37	col liq, or col hex	1.000 <sup>25</sup>	0.00	100.00			
v80	Vanadate	H <sub>38</sub> VO <sub>4</sub>	2738.38		2.010 <sup>25</sup>					
v81	Vanadate	H <sub>39</sub> VO <sub>4</sub>	2809.39	col liq or hex or	1.105 <sup>25</sup>	3.82	101.42			
v82	Vanadate	H <sub>40</sub> VO <sub>4</sub>	2880.40	1.33844 <sup>25</sup>						
v83	Vanadate	H <sub>41</sub> VO <sub>4</sub>	2951.41							
v84	Vanadate	H <sub>42</sub> VO <sub>4</sub>	3022.42							
v85	Vanadate	H <sub>43</sub> VO <sub>4</sub>	3093.43							
v86	Vanadate	H <sub>44</sub> VO <sub>4</sub>	3164.44							
v87	Vanadate	H <sub>45</sub> VO <sub>4</sub>	3235.45							
v88	Vanadate	H <sub>46</sub> VO <sub>4</sub>	3306.46							
v89	Vanadate	H <sub>47</sub> VO <sub>4</sub>	3377.47							
v90	Vanadate	H <sub>48</sub> VO <sub>4</sub>	3448.48							
v91	Vanadate	H <sub>49</sub> VO <sub>4</sub>	3519.49							
v92	Vanadate	H <sub>50</sub> VO <sub>4</sub>	3590.50							
v93	Vanadate	H <sub>51</sub> VO <sub>4</sub>	3661.51							
v94	Vanadate	H <sub>52</sub> VO <sub>4</sub>	3732.52							
v95	Vanadate	H <sub>53</sub> VO <sub>4</sub>	3803.53							
v96	Vanadate	H <sub>54</sub> VO <sub>4</sub>	3874.54							
v97	Vanadate	H <sub>55</sub> VO <sub>4</sub>	3945.55							
v98	Vanadate	H <sub>56</sub> VO <sub>4</sub>	4016.56							
v99	Vanadate	H <sub>57</sub> VO <sub>4</sub>	4087.57							
v100	Vanadate	H <sub>58</sub> VO <sub>4</sub>	4158.58							
v101	Vanadate	H <sub>59</sub> VO <sub>4</sub>	4229.59							
v102	Vanadate	H <sub>60</sub> VO <sub>4</sub>	4300.60							
v103	Vanadate	H <sub>61</sub> VO <sub>4</sub>	4371.61							
v104	Vanadate	H <sub>62</sub> VO <sub>4</sub>	4442.62							
v105	Vanadate	H <sub>63</sub> VO <sub>4</sub>	4513.63							
v106	Vanadate	H <sub>64</sub> VO <sub>4</sub>	4584.64							
v107	Vanadate	H <sub>65</sub> VO <sub>4</sub>	4655.65							
v108	Vanadate	H <sub>66</sub> VO <sub>4</sub>	4726.66							
v109	Vanadate	H <sub>67</sub> VO <sub>4</sub>	4797.67							
v110	Vanadate	H <sub>68</sub> VO <sub>4</sub>	4868.68							
v111	Vanadate	H <sub>69</sub> VO <sub>4</sub>	4939.69							
v112	Vanadate	H <sub>70</sub> VO <sub>4</sub>	5010.70							
v113	Vanadate	H <sub>71</sub> VO <sub>4</sub>	5081.71							
v114	Vanadate	H <sub>72</sub> VO <sub>4</sub>	5152.72							
v115	Vanadate	H <sub>73</sub> VO <sub>4</sub>	5223.73							
v116	Vanadate	H <sub>74</sub> VO <sub>4</sub>	5294.74							
v117	Vanadate	H <sub>75</sub> VO <sub>4</sub>	5365.75							
v118	Vanadate	H <sub>76</sub> VO <sub>4</sub>	5436.76							
v119	Vanadate	H <sub>77</sub> VO <sub>4</sub>	5507.77							
v120	Vanadate	H <sub>78</sub> VO <sub>4</sub>	5578.78							
v121	Vanadate	H <sub>79</sub> VO <sub>4</sub>	5649.79							
v122	Vanadate	H <sub>80</sub> VO <sub>4</sub>	5720.80							
v123	Vanadate	H <sub>81</sub> VO <sub>4</sub>	5791.81							
v124	Vanadate	H <sub>82</sub> VO <sub>4</sub>	5862.82							
v125	Vanadate	H <sub>83</sub> VO <sub>4</sub>	5933.83							
v126	Vanadate	H <sub>84</sub> VO <sub>4</sub>	6004.84							
v127	Vanadate	H <sub>85</sub> VO <sub>4</sub>	6075.85							
v128	Vanadate	H <sub>86</sub> VO <sub>4</sub>	6146.86							
v129	Vanadate	H <sub>87</sub> VO <sub>4</sub>	6217.87							
v130	Vanadate	H <sub>88</sub> VO <sub>4</sub>	6288.88							
v131	Vanadate	H <sub>89</sub> VO <sub>4</sub>	6359.89							
v132	Vanadate	H <sub>90</sub> VO <sub>4</sub>	6430.90							
v133	Vanadate	H <sub>91</sub> VO <sub>4</sub>	6501.91							
v134	Vanadate	H <sub>92</sub> VO <sub>4</sub>	6572.92							
v135	Vanadate	H <sub>93</sub> VO <sub>4</sub>	6643.93							
v136	Vanadate	H <sub>94</sub> VO <sub>4</sub>	6714.94							
v137	Vanadate	H <sub>95</sub> VO <sub>4</sub>	6785.95							
v138	Vanadate	H <sub>96</sub> VO <sub>4</sub>	6856.96							
v139	Vanadate	H <sub>97</sub> VO <sub>4</sub>	6927.97							
v140	Vanadate	H <sub>98</sub> VO <sub>4</sub>	6998.98							
v141	Vanadate	H <sub>99</sub> VO <sub>4</sub>	7069.99							
v142	Vanadate	H <sub>100</sub> VO <sub>4</sub>	7140.00							
v143	Vanadate	H <sub>101</sub> VO <sub>4</sub>	7211.01							
v144	Vanadate	H <sub>102</sub> VO <sub>4</sub>	7282.02							
v145	Vanadate	H <sub>103</sub> VO <sub>4</sub>	7353.03							
v146	Vanadate	H <sub>104</sub> VO <sub>4</sub>	7424.04							
v147	Vanadate	H <sub>105</sub> VO <sub>4</sub>	7495.05							
v148	Vanadate	H <sub>106</sub> VO <sub>4</sub>	7566.06							
v149	Vanadate	H <sub>107</sub> VO <sub>4</sub>	7637.07							
v150	Vanadate	H <sub>108</sub> VO <sub>4</sub>	7708.08							
v151	Vanadate	H <sub>109</sub> VO <sub>4</sub>	7779.09							
v152	Vanadate	H <sub>110</sub> VO <sub>4</sub>	7850.10							
v153	Vanadate	H <sub>111</sub> VO <sub>4</sub>	7921.11							
v154	Vanadate	H <sub>112</sub> VO <sub>4</sub>	7992.12							

50 16:85 HOECHST (PURCHASING)

P. 7

**Program Profil****Colloidal Silica****General Description**

Nalco colloidal silicas are stable dispersions of nanometer size silica particles in water or other liquid medium. Colloidal silica is valuable in many applications ranging from binders for refractories to adsorbents for haze removal in beverages. A wide spectrum of Nalco colloidal silicas has been developed to meet your needs.

Colloidal silica particle sizes range from four to 100 nanometers in diameter. These sub-micron-sized spheres provide very large surface areas, up to 750 square meters per gram of silica solids, which can dramatically impact the binding and reinforcing properties of many organic or inorganic systems.

The surface of the particle is composed of silanol groups which are partially ionized. A counter ion is present as a stabilizer and the resulting system is in equilibrium. The negative charges on the particle surface provide the repulsive forces that are responsible for preventing the particles from colliding and agglomerating.

Nalco colloidal silicas differ from silica powders (fumed, precipitated and gels). Because Nalco colloidal silicas are non-agglomerated and are already dispersed in a liquid medium, there is no mixing or dilution required. Nalco products vary in the type and amount of counter ion, particle size, pH, silica concentration and surface modification.

**Product Applications**

The principal uses of colloidal silica include binder support and silica support for catalysts, binder or coating for high temperature insulation, abrasion-resistant and adhesion-promoting additive for various polymeric coatings, detackifying and anti-blocking agent for organic films, source for pure silica and an antislip agent for wax emulsion formations.

**Refractories/Ceramics**

Because of the very large surface areas and high temperature resistance, colloidal silica is an efficient binder for refractories and special types of ceramics.

**Catalysts**

The large surface area of colloidal silica, teamed with predictable particle size and particle distribution, provides a silica source, porosity and binder support in many catalyst applications.

**Protective Coatings/Inks**

Colloidal silica may be added to protective coatings to prevent weathering and corrosion of metal surfaces. The silica produces a film-forming binder by reacting with the metals and metallic salts in the coating. Inks react in a manner similar to coatings. Additionally, colloidal silica can often serve as a friction aid in inks.

**NALCO CHEMICAL COMPANY**  
**FUNCTIONAL CHEMICALS**

ONE NALCO CENTER • NAPERVILLE, ILLINOIS 60563-1022

SUBSIDIARIES IN ARGENTINA, AUSTRIA, BRAZIL, CHILE, COLOMBIA, ECUADOR, HUNGARY, FRANCE, HOLLAND, HONG KONG, ITALY, JAPAN, PHILIPPINES, SAUDI ARABIA, SPAIN, SWEDEN, TAIWAN, USA, VENEZUELA AND WEST GERMANY • AFFILIATES IN AUSTRALIA, CANADA, INDIA, INDONESIA, MEXICO, SINGAPORE, SOUTH AFRICA, THE UNITED KINGDOM AND USA.

Registered Trademarks of Nalco Chemical Company

©1989 Nalco Chemical Company

# NALCO COLLOIDAL SILICAS

## General Product Information (Typical Values Only)

Same as  
1043

Product: Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®	Nalco®
1115	2326	1139	1039	1140	1034A	1040	2327	1050	2060	2329					
Particle Size (nm)	4	5	8	13	15	20	20	20	20	20	20	20	20	60	75
Surface Area (m <sup>2</sup> /gm)	750	600	375	230	200	150	150	150	50	40					
% Silica (as SiO <sub>2</sub> )	15	15	30	30	40	34	40	40	50	40					
pH (@ 25°C)	10.5	9.0	10.0	10.2	9.7	2.8	9.0	9.3	8.5	8.4					
Specific Gravity	1.10	1.09	1.21	1.20	1.29	1.23	1.29	1.29	1.39	1.29					
Viscosity (Centipoise)	<10	<10	<10	<10	15	<10	15	20	55	15					
Stabilizing Ion	Sodium	Ammonium	Sodium	Sodium	Sodium	-	Sodium	Ammonium	Sodium	Sodium					
Approx. Na <sub>2</sub> O, %	0.75	0.02	0.45	0.50	0.45	0.04	0.45	0.08	0.40	0.35					
Surface Charge	Negative	Negative	Negative	Negative	Negative	Slightly Negative	Negative	Negative	Negative	Negative					

